TABLE							
PART NUMBER	"A" DIM.	"B" DIM.	LENGTH	WIDTH	CUTOUT	LOCATION	CLASSIFICATION
R68091-100	1.446	1.043	8' 4"± 1/4"	6"± 1/4"	NONE	WHITEMAN AND BARKSDALE	UNCLASSIFIED
R68091-200	1.759	1.676	10'± 1/4"	6"± 1/4"	DETAIL "A"	WHITEMAN AND BARKSDALE	UNCLASSIFIED
R68091-300	.855	.772	10'± 1/4"	6"± 1/4"	DETAIL "A"	WHITEMAN AND BARKSDALE	UNCLASSIFIED
R68091-400	.375	.375	30"± 1/4"	30"± 1/4"	NONE	NOT CURRENTLY USED	UNCLASSIFIED
R68091-500						MINOT	UNCLASSIFIED

DESIGN AGENCY PART NUMBER	REVISIONS						
	ISS	SHEET ZONE	PREPARED BY	DESCRIPTION	DATE	CHKR	APVD
SEE TABULATION	A		C. MATTHEWS, 2996/ D. SWAHLAN, 5832				DS

NOTES:

1. MATERIAL MAY BE CAST OR EXTRUDED SYNTHETIC RUBBER OR URATHANE.
2. SHORE A HARDNESS 60 +/- 5.
3. COMPRESSION STRENGTH OF 250 psi OR GREATER.
4. TEMPERATURE RANGE OF -60 TO 140 DEGREES F.
5. COMPRESSIVE MODULUS OF 20,000 psi OR GREATER.
6. MANUFACTURER SHALL PROVIDE ADHESIVE RECOMANDATIONS FOR BONDING STRIPS TO STEEL AND CONCRETE.

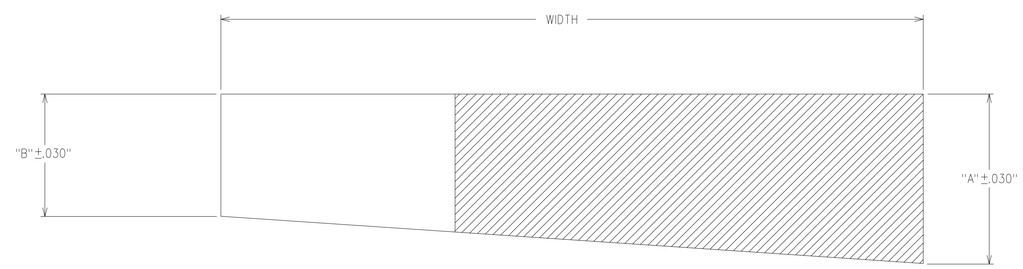

SECTION A-A

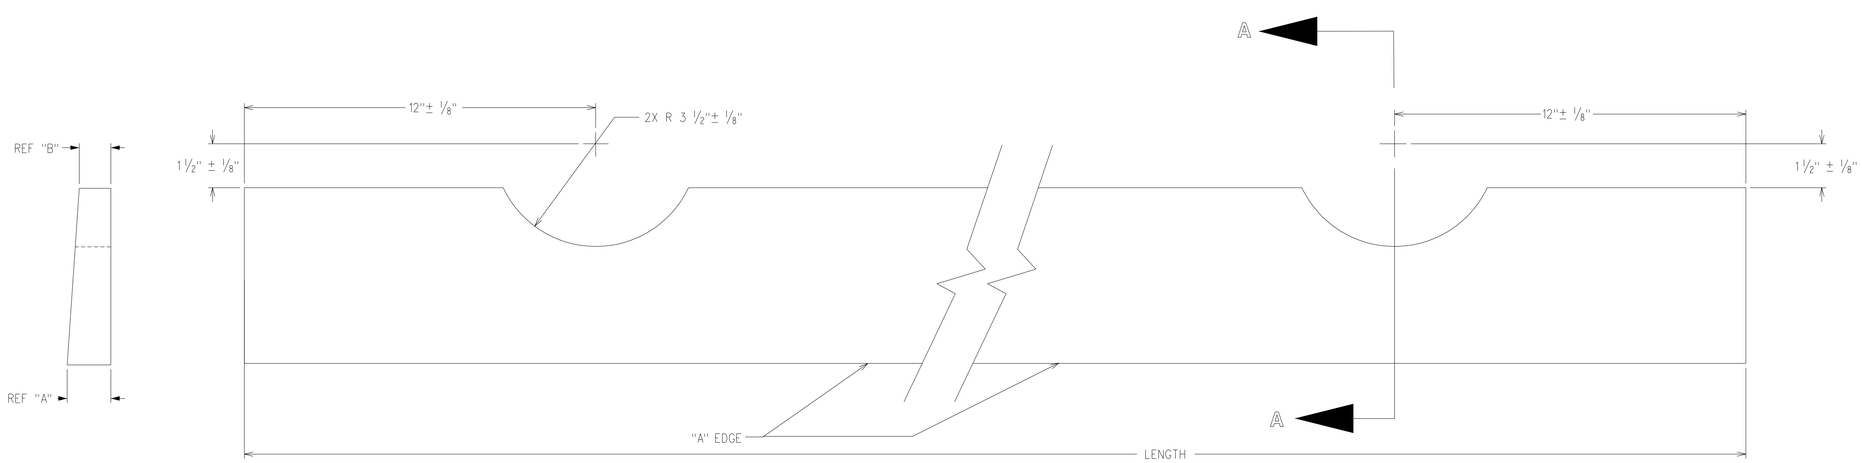

DETAIL "A"

SHEET	1	2	3	4	5	6	TITLE MAT, RUBBER (U)
ISSUE	A						
PART CLASSIFICATION SEE TABULATION							
DRAWING CLASSIFICATION UNCLASSIFIED							SIZE E / DRAWING NUMBER R68091
							CAGEC 14213 / SCALE NONE / SHEET 1 OF 1
STATUS SA-CHK-04/05/02							ORIGIN SA-MSJ